

# Pressure Reducing Valves

Technical Guide W4.54

The Singer models 106-PR / 206-PR Pressure Reducing Valves sense the downstream pressure through a connection at the valve outlet. Under flowing conditions, the pilot reacts to small changes in pressure to maintain a steady downstream pressure.



## Applications

Potable water  
Municipal  
Mining Applications  
Irrigation Applications  
Water loss management

## Product Attributes

Ideal for maintaining accurate downstream pressure  
Responds quickly and effectively

## Approvals/Standards

AS 5081:2008  
Flanges to AS/NZS 4087 Fig. B5  
Coating complies with AS/NZS 4158



**Licence Number:**  
WMK/SMK26726

*We are the supply partner of choice for New Zealand's civil construction industry, specialising in water and infrastructure based solutions.*

# The Singer Pressure Reducing Valves are based on the 106-PG or 206-PG main valves and are configurable to suit your application.

The pilot valves sense the downstream pressure through a connection at the valve outlet. Under flowing conditions, the pilot reacts to small changes in pressure to control the valve position by modulating the pressure above the diaphragm. The downstream pressure is maintained virtually steady at the pilot set-point.

In typical pressure reducing applications, the reduced port model 206-PR is often the best selection.

## STANDARD MATERIALS

Standard materials for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- AISI 303 / 316 stainless steel trim
- Buna-N / EPDM diaphragm and seals

## ORDERING INSTRUCTIONS

Refer to the order form and ordering instructions.


Additionally, include the following information for this product:

1. Single chamber (106) or (206)
2. Outlet pressure range

## SELECTION SUMMARY

1. Select the valve series and size with sufficient capacity
2. Check the operating flow against valve minimum.
3. If the outlet pressure is less than 35% of the inlet pressure, check for cavitation.
4. Ensure that the flange rating exceeds the maximum operating pressure.

Refer to the Singer Control Valve Sizing Calculator on our website for assistance.

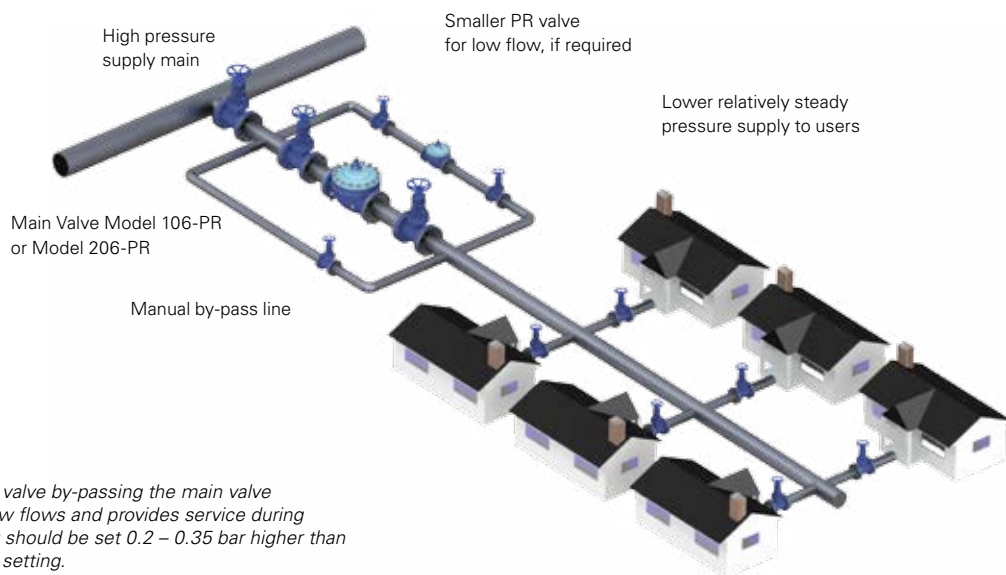

### Note:

- The smaller PR valve by-passing the main valve helps control low flows and provides service during maintenance. It should be set 0.2 – 0.35 bar higher than the larger valve setting.
- Singer Valve single rolling diaphragm technology 150 mm and larger have extremely precise control, even at low flows, making smaller by-pass valves unnecessary except for possible bypass during maintenance.

FIG. 1 Typical application

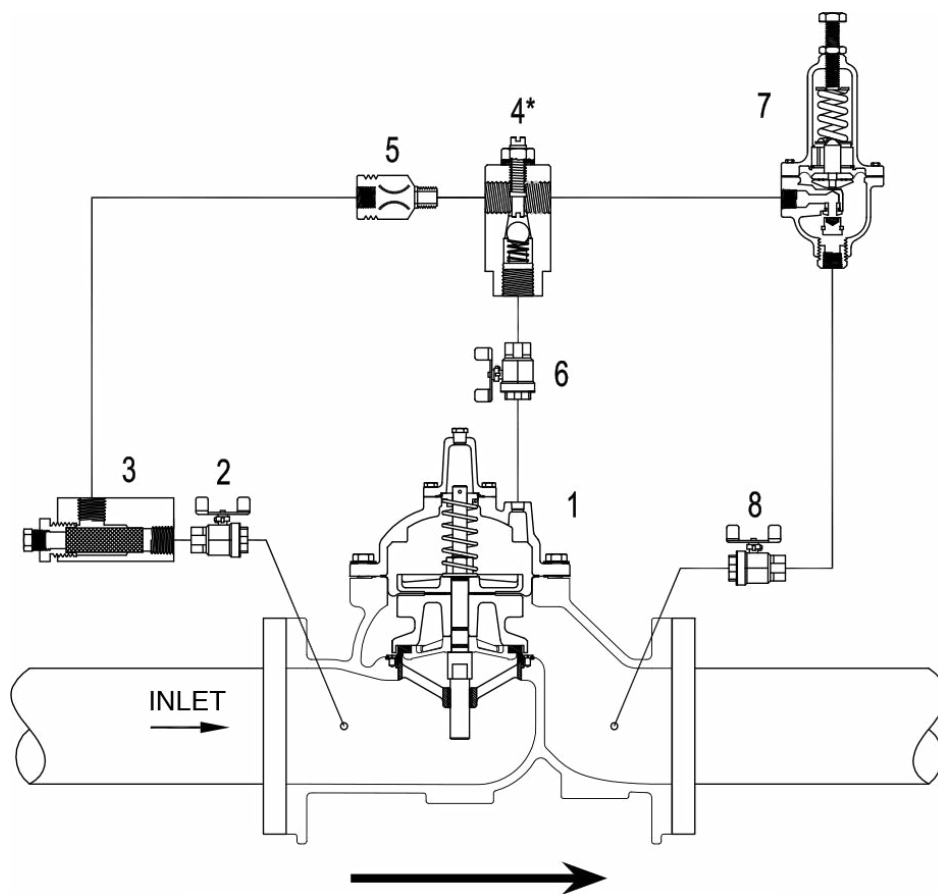


FIG. 2 Schematic A-0306C

### SCHEMATIC DRAWING

1. Main Valve - 106-PG or 206-PG
2. Isolation Valve - standard 100 mm and larger
3. Strainer - standard 100 mm and larger
4. Model 26 Flow Stabilizer / Opening Speed Control
  - Standard on valves 200mm 106, 250mm 206 and smaller
5. Fixed Restriction
6. Isolation Valve - standard 100 mm and larger
7. Model 160 pilot. Specify for:
  - 0.35 to 3.5 Bar
  - 0.70 to 5.5 Bar
  - 1.38 to 13.8 Bar
  - 6.9 to 20.7 Bar
8. Isolation Valve - standard all sizes

**Note:** Singer Rolling Diaphragm shown is available for 150mm 106-PG and larger.

**TABLE 1 106-PR**

Code	Size (mm)	Minimum Flat Diaphragm (L/s)	Maximum Continuous (L/s)
Indent	15	0.1	0.8
Indent	19	0.1	1
Indent	25	0.1	3
Indent	32	0.1	6
Indent	40	0.1	8
VC50PRV106S	50	0.3	13
Indent	65	0.3	19
VC80PRV106S	80	0.3	29
VC100PRV106S	100	0.6	50

**TABLE 2 106-PR**

Code	Size (mm)	Minimum Flat Diaphragm (L/s)	Minimum Rolling Diaphragm (L/s)	Maximum Continuous (L/s)
VC150PRV106S	150	1.3	0.1	114
VC200PRV106S	200	2.5	0.1	196
VC250PRV106S	250	-	0.2	309
VC300PRV106S	300	-	0.2	442
VC350PRV106S	350	-	0.2	536
VC400PRV106S	400	-	0.2	694
Indent	500	-	0.6	1104
Indent	600	-	0.6	1628
Indent	900	-	1.3	3500

**TABLE 3 206-PR**

Code	Size (mm)	Minimum Flat Diaphragm (L/s)	Minimum Rolling Diaphragm (L/s)	Maximum Continuous (L/s)
VC80PRV206S	80	0.3	-	19
VC100PRV206S	100	0.3	-	37
VC150PRV206S	150	0.6	-	65
VC200PRV206S	200	1.3	-	145
VC250PRV206S	250	2.5	-	260
VC300PRV206S	300	-	0.2	404
VC400PRV206S	400	-	0.2	582
VC450PRV206S	450	-	0.2	1040
Indent	500	-	0.2	1040

**TABLE 4 206-PR**

Code	Size (mm)	Minimum Rolling Diaphragm (L/s)	Maximum Continuous (L/s)
Indent	600 x 400	0.2	1041
Indent	600 x 500	0.2	1370
Indent	700	0.6	2120
Indent	700	0.6	2123
Indent	800	0.6	2126
Indent	900	0.6	2132
Indent	1000	0.6	3912

\*Refer to 106-PG (W4.57) and 206-PG (W4.58) Main Body Technical Guides for more information.

**Branches Nationwide** Support Office & Technical Services 0800 93 7473

**Disclaimer:** While every effort has been made to ensure that the information in this document is correct and accurate, users of Hynds product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hynds unless expressly stated in any sale and purchase agreement entered into between Hynds and the user.